Quick start guide

aranet

What does Aranet2 monitor?

Temperature
The range of the temperature measurement spans from 0 to 50 °C / 32 to 122 °F

Relative humidity
The range of relative humidity measurement spans from 0 to 99 %. The humidity below 30 % can cause skin drying and irritation. Levels above 50 % can cause bacteria and mold breeding.

Pop in the batteries and your Aranet2 is ready to go.
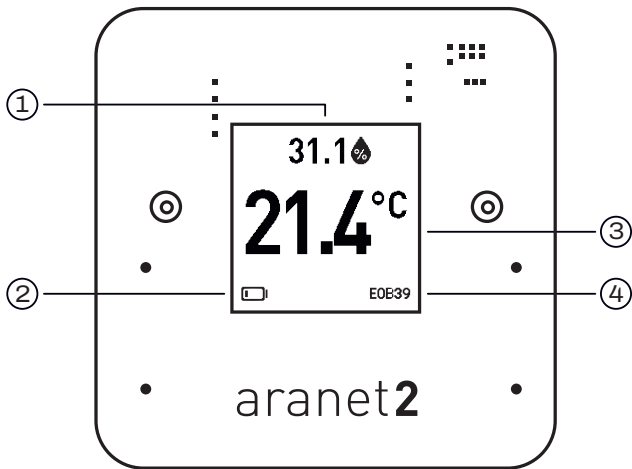
⚠ CAUTION

- The Aranet2 is not impact resistant
- Do not leave an Aranet2 in direct sunlight or freezing temperatures
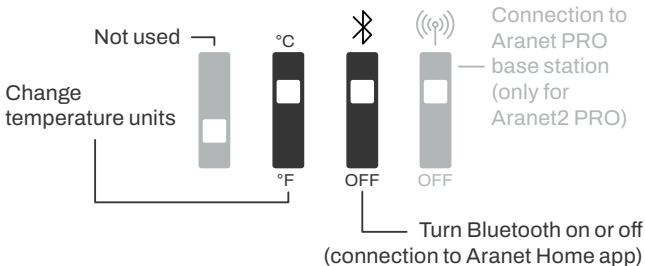
① Relative humidity (%) ③ Temperature (°C, °F)

② Battery level ④ Unique device ID

① 31.1 💧

21.4 °C

② 🔋 ④ E0B39

aranet**2**

Configuration switches

Switches can be found behind the batteries
Use the attached pin to adjust these settings:

Not used

Change temperature units

°C
°F

Connection to Aranet PRO base station (only for Aranet2 PRO)

OFF

Turn Bluetooth on or off
(connection to Aranet Home app)

User manual

Scan to see the detailed version

Aranet Home app

Scan to download

aranet home

Aranet2
Office

24.5 °c   29.4 %

Aranet4
Living room

CO_2 592 ppm

24.5 °c   29 %   1004 hPa

Download the Aranet Home app and connect
your smartphone to the Aranet2:

Access
measurement data

Store and export up to
90 days worth of data

Change sensor measurement
frequency and more